




# STEAMBATH

## Control - Model TC-135

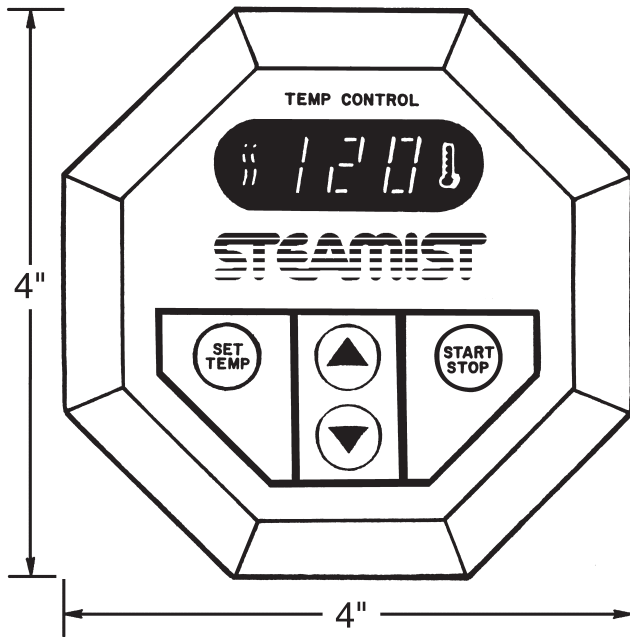

### **Required Electrical Service**

Low voltage connection from SM generator via multi-conductor cable (supplied).

### **Product Information:**

Programmable Temperature and Pre-set Timer.

Digital display of ambient and pre-set temperature.

Temperature icons for system status.

Dimensions: 4" x 4"

Stand alone or in conjunction w/ TC-110

Package includes control, 25ft multi-conductor cable, .75" steamhead & escutcheon, strain relief clamp, silicone sealant, installation and operating instructions.

### **Installation Notes:**

- Surface Mount – 1.5" hole required
- Mounts **inside only**
- Cable should run through .75" conduit
- Mount control near seating area

### **Rough-In notes:**

Control should be mounted 48" above floor

Steamhead to be mounted 18" above floor or 6" above rim of tub and as far from the seating area as possible.

### **Product No.- Finishes**

135-01.75 – Polished Chrome

135-02.75 – White

135-03.75 – Polished Brass

135-04.75 – Polished Nickel

135-05.75 – Brushed Nickel