




STEAMBATH

Control - Model DSC-425

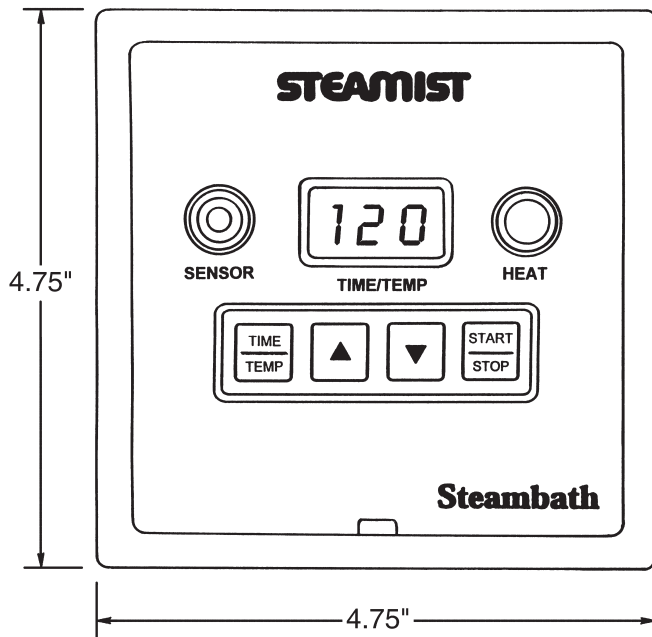

Required Electrical Service

Low voltage connection from SM generator via multi-conductor cable (supplied)

Product Information:

Programmable Time and Temperature.

Digital display of ambient and pre-set temperature and elapsed time.

Temperature icons for system status.

Dimensions: 4.75" x 4.75"

Package includes control, 25ft multi-conductor cable, .75" steamhead & escutcheon, strain relief clamp, (4) s/s mounting screws, silicone sealant, installation and operating instructions.

Installation Notes:

- Requires (2) metal gangable switch boxes twinned together
- Mounts **inside only**
- Cable should run through .75" conduit
- Mount control near seating area

Rough-In notes:

Control should be mounted 48" above floor

Steamhead to be mounted 18" above floor or 6" above rim of tub and as far from the seating area as possible.

Product No. - Finishes

425-10 – Polished Chrome	425-15 – Pewter
425-11 – Brushed Chrome	425-16 – Antique Brass
425-12 – Polished Nickel	425-17 – Polished Brass
425-13 – Brushed Nickel	425-18 – 24K Polished Gold
425-14 – Black Nickel	425-19 – Oil-Rubbed Bronze