




STEAMBATH

Control - Model TC-110

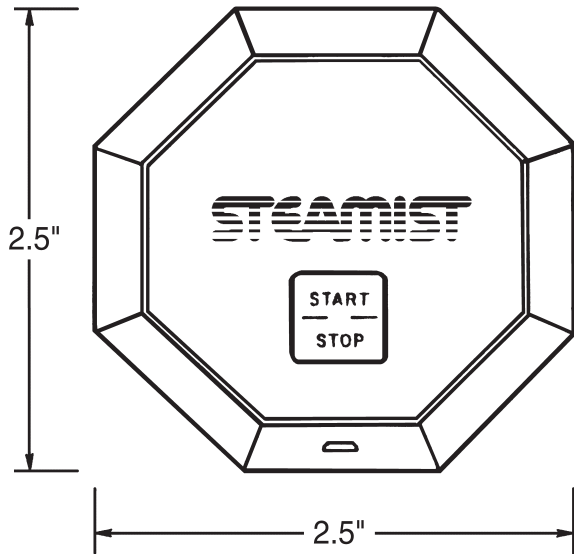

Required Electrical Service

Low voltage connection from SM generator via multi-conductor cable (supplied)

Product Information:

Pre-set Timer w/ L.E.D. Indicator

Dimensions: 2.5" x 2.5"

Stand alone or in conjunction w/ TC-135

Package includes control, 25ft multi-conductor cable, .75" steamhead & escutcheon, strain relief clamp, silicone sealant, installation and operating instructions.

Installation Notes:

- Surface Mount – 1" hole required
- Mounts inside (stand alone) or outside (w/ TC-135)
- Cable should run through .75" conduit
- For inside location, mount control near seating area

Rough-In notes:

Control should be mounted 48" above floor

Steamhead to be mounted 18" above floor or 6" above rim of tub and as far from the seating area as possible.

Product No. – Finishes

110-01.75 – Polished Chrome

110-02.75 – White

110-03.75 – Polished Brass

110-04.75 – Nickel