


## à la carte™ swivel-tilt

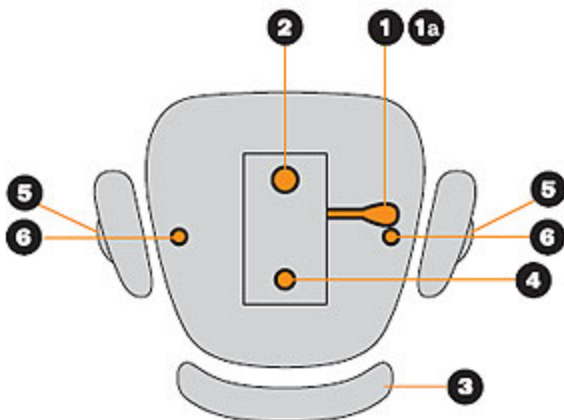

### **1 Pneumatic seat height**

To raise chair, lift body weight up and pull lever up. To lower chair, remain seated and pull lever clockwise.

### **1a Upright back lock**

While in the upright position, push the lever in and the chair will not tilt; pull it out and the chair can tilt.

### **2 Tilt tension**

To decrease tension, turn counterclockwise. To increase tension, turn clockwise.

### **3 Back height**

Grab chair back with both hands and slowly pull up to desired height. To lower back, pull up to highest position, and back will drop to lowest position. Reset mechanism by pushing down firmly, then adjust upward.

### **4 Seat depth via back**

Loosen bolt and adjust back in or out to desired position. Retighten bolt.

### **5 Arm height**

Squeeze trigger under outside of arm cap and raise or lower arm to desired height. Release trigger.

### **6 Maintenance arm width**

Loosen screws under arm bracket, adjust arm in or out, tighten screws.

**note:** your chair may not have all the adjustments shown.