

TOTO®

CST744EG Eco Drake® Close Coupled Toilet, 1.28 GPF



CST744EG - Eco Drake® Toilet
SS114 - SoftClose® Seat



E-Max® Technology: Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet.



Fast Flush: New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Contemporary, high profile design
- E-Max® Technology
- Powerful, quiet flush every time
- Wide, 2-1/8" computer designed trapway
- Large water surface
- SanaGloss® technology: Super smooth, ion barrier glazing helps keep your toilet clean

High profile close coupled toilet. Low consumption (1.28 Gpf/4.8 Lpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ CST744EG

Elongated, 12" rough-in, less seat. SanaGloss® glazing.

□ C744EG

Elongated bowl only, 12" rough-in. SanaGloss® glazing.

□ ST743E

Drake tank and cover only. Complete with tank trim and coupling components.

□ SS114

SoftClose®: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

□ SC134

Elongated, open front seat with lid.

□ SC534

Elongated, open front seat less lid.

Trip Lever:

Standard #CP Chrome Plated



CST744EG

Eco Drake® Close Coupled Toilet, 1.28 GPF

■ PERFORMANCE

The TOTO® E-Max® low consumption toilets received high ratings during ANSI/ASME and CSA testing at independent laboratories. Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

■ SPECIFICATIONS

Water Use:	1.28 Gpf / 4.8 Lpf
Flush System:	Gravity Feed (E-Max® Technology)
Min. Water Pressure:	8 psi
Water Surface:	10-1/4" x 8-1/2"
Trap Diameter:	2-1/8"
Rough-in:	12" rough-in
Trap Seal:	2-1/2"
Acoustic Reading:	65-70dB (may vary depending on room construction)
Warranty:	Five Year Limited Warranty
Material:	Vitreous china
Shipping Weight:	C744EG 52 lbs. ST743E 35 lbs.


Shipping Dimensions: **C744EG** 27-3/4"L x 15"W¹
x 11-3/8"W² x 15-1/8"H

ST743E 20-1/8"L x 8-1/4"W
x 15-1/2"H

Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.

Listing and approval: IAPMO/c-UPC, CSA, City of Los Angeles, State of MA, and others

These dimensions and specifications are subject to change without notice.

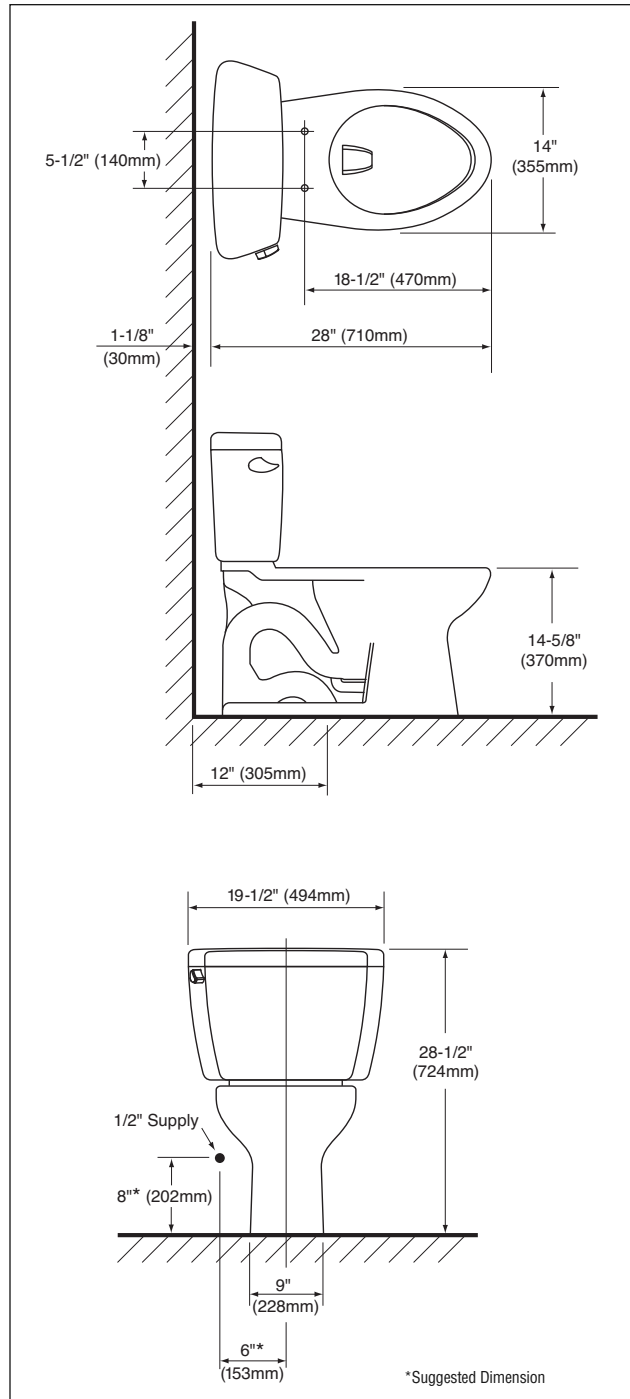

CST744EG - Eco Drake® Toilet

TOTO®

TOTO U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260
Tel. (770) 282-8686 • Fax. (770) 282-8701 • www.totousa.com
Printed in U.S.A. © TOTO LTD. 12/07 #A10430

Printed on recycled paper ♻️

REV 06/08