

# TOTO®


## CST754EF Eco Dartmouth® Two-Piece Toilet, 1.28 GPF




CST754EF - Eco Dartmouth® Toilet  
SS154 - SoftClose® Traditional Seat



**E-Max™ Technology:** Quiet, powerful, commercial grade flushing performance.



Choose a SoftClose® toilet seat, or upgrade to a Washlet®.

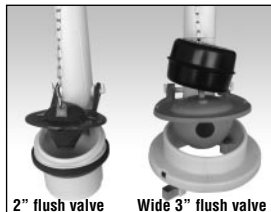

2" flush valve      Wide 3" flush valve  
**Fast Flush:** New, wide 3" flush valve is 125% larger than conventional 2" flush valves.

- Classic design, two piece toilet
- Universal Height 16-1/8" rim height
- E-Max™ Flushing Technology
- Powerful, quiet flush every time
- Large water surface
- Designer Suite:
  - Matching Dartmouth® pedestal and self-rimming lavatories

Decorative, ADA compliant, high profile two piece toilet. Low consumption (1.28 Gpf/4.8 Lpf) siphon jet flushing action.

Tank cover, fittings, chrome plated trip lever, less seat.

■ **CST754EF**

Elongated, 12" rough-in, less seat

□ **C754EF**

Elongated bowl only, 12" rough-in.

□ **ST753E**

Dartmouth® tank and cover only. Complete with tank trim and coupling components.

□ **SS154**

SoftClose® Traditional: Seat and lid gently close with a touch of a hand. Elongated, closed front seat with lid.

*Colors:*

*Standard* #01 Cotton

*Optional* See price book for additional colors

*Trip Lever:*

*Standard* Color Matched

*Optional* See price book for additional finishes



IAPMO R&T

**Augusta Decorative Collection**

# CST754EF

## Eco Dartmouth® Two-Piece Toilet, 1.28 GPF

### ■ PERFORMANCE

The TOTO E-Max® low consumption toilets received high ratings during ANSI/ASME at independent laboratories.

Designed with a powerful siphon jet flushing action, the toilet offers a large water surface and a glazed trapway.

### ■ SPECIFICATIONS

Water Use: 1.28 Gpf / 4.8 Lpf  
 Flush System: Gravity Feed (E-Max Technology)  
 Min. Water Pressure: 8 psi  
 Water Surface: 10-3/8" x 8-1/4"  
 Trap Diameter: 2-1/8"  
 Rough-in: 12" rough-in  
 Trapseal: 2-3/8"  
 Warranty: Five Year Limited Warranty  
 Material: Vitreous china

Shipping Weight: **C754EF** 56.5 lbs.  
**ST753E** 39.5 lbs.

Shipping Dimensions: **C754EF** 29-1/8"L x 11-7/8"W<sub>1</sub> x 15" W<sub>2</sub> x 17-3/8"H  
**ST753E** 23-1/4"L x 9-5/8"W x 20-7/8"H

*Fixture dimensions and hydraulic performance meet or exceed ANSI/ASME standard A112.19.2 and CAN/CSA B 45 requirements.*


*Listing / Approvals: shall be IAPMO/c-UPC certified. Shall be Watersense compliant.*



*Meets the American Disabilities Act Guidelines and ANSI A117.1 requirements where installed so top of seat is 17"-19" from the finished floor.*

*Recommended seat: SS154*

*These dimensions and specifications are subject to change without notice.*

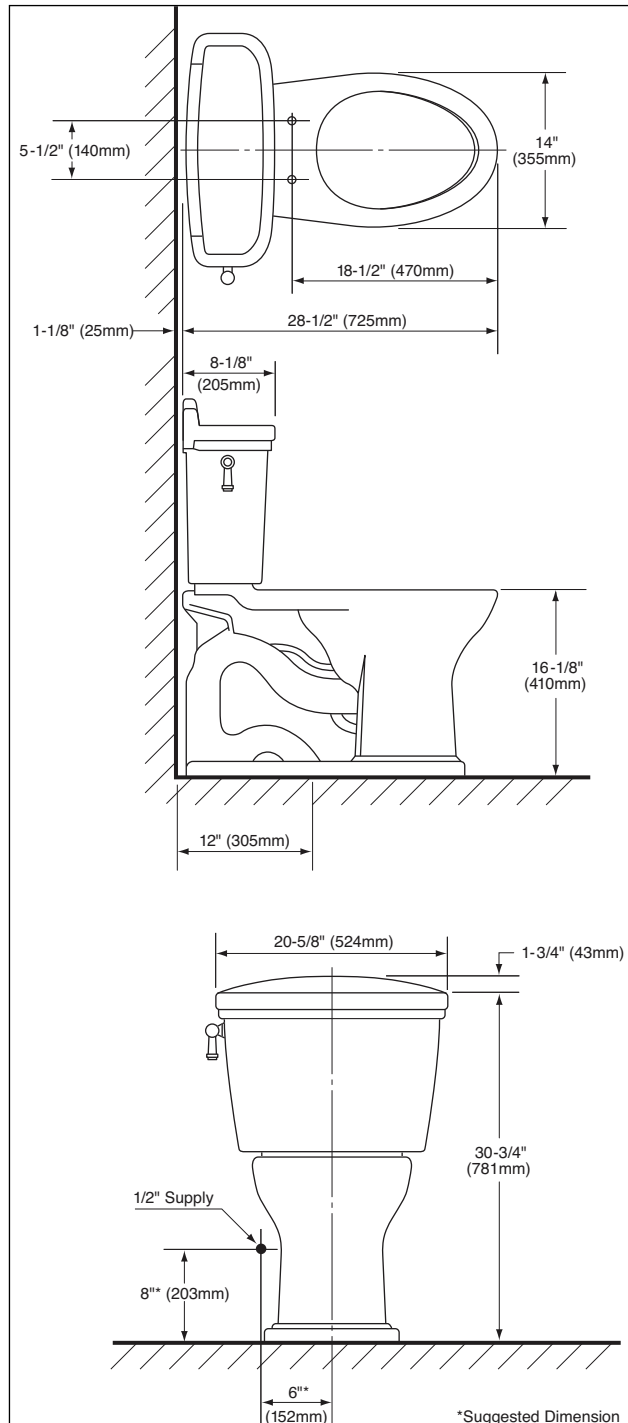

**CST754EF - Eco Dartmouth® Toilet**

**TOTO®**

TOTO® U.S.A., INC. • 1155 Southern Road, Morrow, GA 30260  
 Tel. (888) 295-8134 • Fax. (800) 699-4889 • www.totousa.com  
 Printed in U.S.A. © TOTO U.S.A. 08/07 #A10410

Printed on recycled paper

REV 10/07