

Harness Adjustment Instructions

(for Sit 'n' Stroll with manufacturing date after August 1999)



FOR YOUR CHILD'S SAFETY, THE SIT'N'STROLL UTILIZES A "CONTINUOUS LOOP," 5 POINT HARNESS SYSTEM, THE KIND MOST RECOMMENDED BY SAFETY EXPERTS. ALL HARNESS ADJUSTMENTS ARE MADE BY USING TWO ADJUSTMENT POINTS. SEE DIAGRAM BELOW FOR DETAIL ON ROUTING OF HARNESS.

WARNING: Never use this product without the carseat's harness securely buckled.

As your child grows, you will need to make periodic adjustments to the harness system to accommodate your child safely and comfortably. For the day-to-day or week-to-week adjustment, simply use the adjustment slide located on your baby's left shoulder strap. Generally speaking, the tighter the harness, the more effective it will be in protecting your child in the event of a crash. However, use your best judgement and gauge your baby's comfort when using this system.


You will also find that for comfort and safety, it is best to move the shoulder straps to a higher placement on the back of the seat as your baby gets larger. In addition, you will need to use the following instructions whenever you want to remove the fabric cover for washing or cleaning.

WARNING: Harness must always be routed behind/under plastic shell; never just behind seat cover.

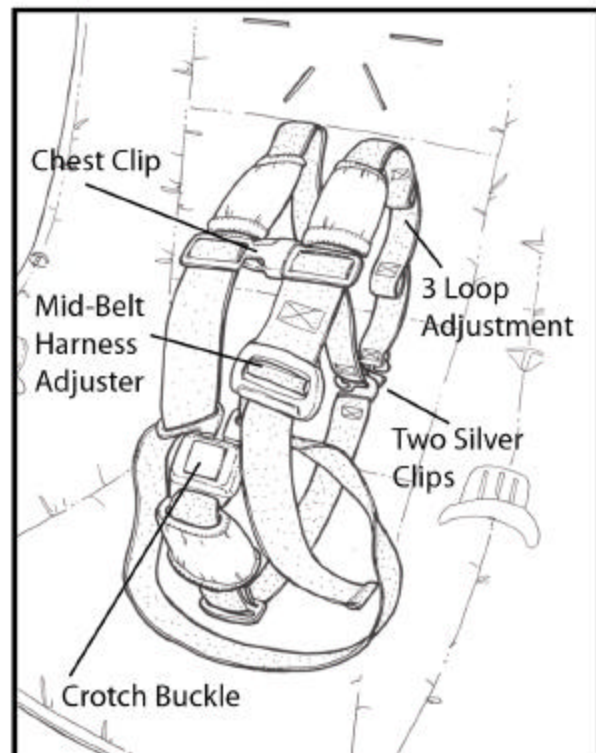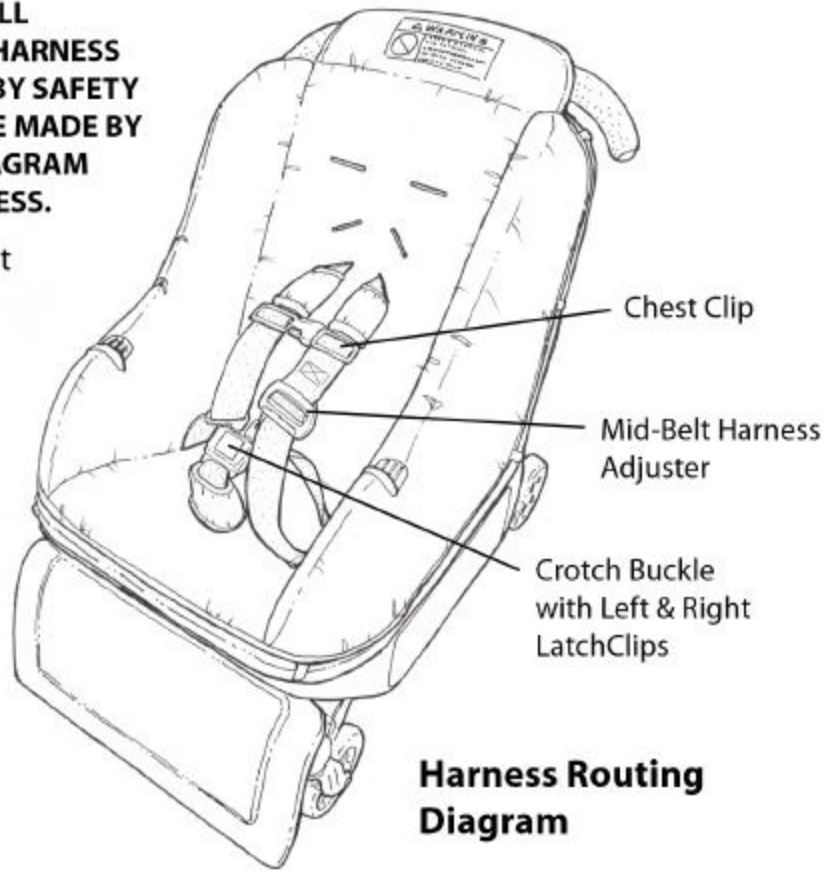


To Install Harness:


When you are ready to re-install the harness, after washing the cover or changing the shoulder strap location, assure that the cover is on straight and the buckle between the child's legs is pulled up and clear of the cover, ready for use. Both the plastic covered metal clips should be buckled into the black and red buckle and you should have a very long piece of webbing with the black plastic chest clip on it with the unthreaded side to your left ready to install back into the Sit 'n' Stroll.

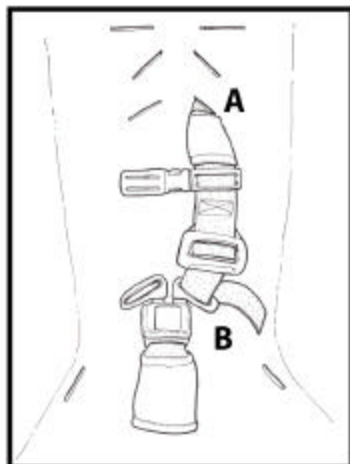

A. While facing the Sit'n'Stroll, take the end of the long webbing piece with the three loop adjustment and thread it over your baby's left shoulder into the proper slot (at shoulder height or above for forward-facing, at or below for rear-facing). Leave this end for now and pick up the other end of webbing with the single loop. The webbing will be attached to the crotch strap in Step D.

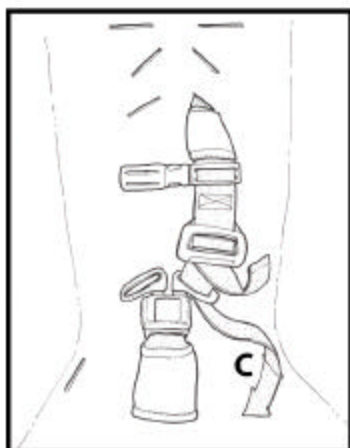

B. Using the end of the webbing with a single loop, feed webbing through the right side of the black plastic covered metal latch clip in the crotch buckle with the red button. When feeding through, go from the front to back of the clip. Pull the slack through and check that you haven't twisted the webbing.

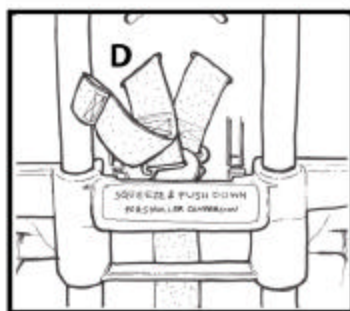

C. At your baby's left hip, you will find a slit in the fabric and below is a hole in the plastic. Push the end of the webbing into this hole while reaching under the stroller and pulling from below. From below the stroller, you will see the webbing emerge from the left side hole. Take the end and thread it up through the matching hole on the right side, below your baby's right hip. Pull the end of the webbing up through the fabric cover through the hole next to your baby's right hip and pass it back to the front through the left black plastic covered metal latch clip in the crotch buckle. Thread through the metal latch clip from back to front. Pull the slack through the system, again leaving enough slack for your baby's hips.

D. Weave the end of the webbing up through the adjoining left side of the chest clip. Feed the webbing through the seat fabric and plastic at the baby's right shoulder slot (at shoulder height or above for forward-facing, at or below for rear facing). Behind the seat, the loop at the end of the webbing should then slide into the rear clip of the two silver clips at the end of the crotch strap. The webbing, which was fed through the seat fabric and plastic in Step A, should now slide into the front clip of the two silver clips at the end of the crotch strap.

To Adjust Harness:

There are two ways to adjust the harness length. The first is by using the slack at the end of the adjuster clip on the front right side of the harness. The second is by using the three loop adjustments located on the webbing feeding over the baby's left shoulder.

To lengthen: Squeeze the top and bottom of the black mid-belt harness adjuster with your thumb and index finger. Pull on the longer end of webbing extending out of the back of the adjuster. This will pull the webbing slack through the harness adjuster. The webbing should then be worked underneath the seat and up the slot near the baby's right hip. This will give extra room on the baby's right side of the harness. To lengthen the harness on the baby's left side, turn the seat so that you are facing the back of the stroller. On the left piece of webbing coming through the seat from the front, there should be three loops. Slide the loop out of the front silver clip. About 4 inches away from that loop should be another loop. Slide this loop into the front silver clip. In the front of the seat, use the adjuster clip on the baby's front left side to tighten any extra slack that is not needed.