

Catalog Information

Model	Description	Lamp/Wattage	Finishes
MI-1126-BK	Surface mount fixture 2 1/2" Base	MR11/20W – 35W	Black
MI-1126-WT	Surface mount fixture 2 1/2" Base	MR11/20W – 35W	White
MI-1126-BN	Surface mount fixture 2 1/2" Base	MR11/20W – 35W	Brushed Nickel

Product Features

- Mounting:** May be surface mounted to walls and ceilings.
- Lamp:** MR11 35W maximum.
- Aiming:** 90° degrees from vertical and 356° rotational.
- Lamping:** Re-lamps from the front, lamp retained by a threaded ring.
- Socket:** Bi-pin ceramic with 18 gauge Teflon insulated wires, with fiberglass sleeves.
- Transformer:** Not supplied, requires a remote transformer.

Transformer Selection

Model	Description	Volt	Watt	Finish
EN-12P-AR	Electronic	120-12V	60W	WT
EN-12PL-AR	Electronic	120-12V	75W	WT
EN-12PS	Electronic	120-12V	60W	WT
EN-12PE-AR	Electronic	120-12V	100W	BK
EN-12PX-AR	Electronic	120-12V	150W	BK
EN-24PX-AR	Electronic	120-24V	150W	BK
EN-B12PY-AR	Electronic	120-12V	250W	GY
EN-B24PZ-AR	Electronic	120-24V	300W	BK
EN-33PS	Electronic	120-12V	60W	BK, WT
SRT-250M	Magnetic	120-12/24V	250W	GY
SRT-500M	Magnetic	120-12/24V	500W	GY
SRT-1000M	Magnetic	120-24V	1000W	BK

Finish Key: BK-Black, GY-Gray, WT-White

Options/Accessories

- Lens Options: Colored, Colored Dichroic, Ultra Violet, Beam Elongator, and Spread lenses.
- Honey Comb Louver to be used with a protective glass covered MR11G lamp.
- Fixtures available with 6", 12", 18", 24", 36", 48", 72" and 96" extensions (factory assembled in BK, WT, or BN). Specify fixture style and finish when ordering (i.e.: X18-MI-1126-BK). Extensions are non-stock items, available only as a complete unit from the factory. Note: Extensions over 48" in length are shipped with two shorter rods and a threaded coupler, to be joined in the field.

Material

Die Cast Aluminum

Listing

ETL, CETL Listed.


W.A.C. reserves the right to change details that do not affect overall function and performance.



SPECIFICATION SHEET

LOW VOLTAGE SURFACE MOUNTS

MODEL MI-1126

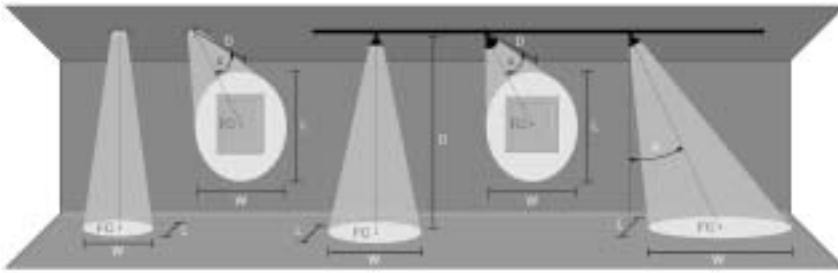

Key In Feet
D Distance To Fixture From Wall Or Floor
FC Initial Footcandle Level At Center Of Beam
L Beam Length (where candlepower drops to 50% of maximum)
W Beam Width (where candlepower drops to 50% of maximum)
CBCP Center Beam Candle Power

Lamp Beam Spread	CBCP	0° Aiming Angle				30° Aiming Angle				45° Aiming Angle				60° Aiming Angle			
		D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
20W MR11 NFL 30° FTD	600	2'	150	1.1'	1.1'	2'	97	1.5'	1.2'	2'	53	2.3'	1.5'	2'	19	5.5'	2.1'
		3'	67	1.6'	1.6'	3'	43	2.2'	1.9'	3'	24	3.5'	2.3'	3'	8	8.2'	3.2'
		4'	38	2.1'	2.1'	4'	24	2.9'	2.5'	4'	13	4.6'	3.0'	4'	5	10.9'	4.3'
		5'	24	2.7'	2.7'	5'	16	3.7'	3.1'	5'	8	5.8'	3.8'	5'	3	13.7'	5.4'
20W MR11* NSP 17° FTC	1760	3'	196	0.9'	0.9'	3'	127	1.2'	1.0'	3'	69	1.8'	1.3'	3'	24	3.8'	1.8'
		5'	70	1.5'	1.5'	5'	46	2.0'	1.7'	5'	25	3.1'	2.1'	5'	9	6.4'	3.0'
		7'	36	2.1'	2.1'	7'	23	2.8'	2.4'	7'	13	4.3'	3.0'	7'	4	9.0'	4.2'
		9'	22	2.7'	2.7'	9'	14	3.6'	3.1'	9'	8	5.5'	3.8'	9'	3	11.5'	5.4'
35W MR11* SP 20° FTF	3000	3'	333	1.1'	1.1'	3'	217	1.4'	1.2'	3'	118	2.2'	1.5'	3'	42	4.7'	2.1'
		5'	120	1.8'	1.8'	5'	78	2.4'	2.0'	5'	42	3.6'	2.5'	5'	15	7.8'	3.5'
		7'	61	2.5'	2.5'	7'	40	3.3'	2.9'	7'	22	5.1'	3.5'	7'	8	10.9'	4.9'
		9'	37	3.2'	3.2'	9'	24	4.3'	3.7'	9'	13	6.6'	4.5'	9'	5	14.0'	6.3'
35W MR11 NFL 30° FTH	1300	3'	144	1.6'	1.6'	3'	94	2.2'	1.9'	3'	51	3.5'	2.3'	3'	18	8.2'	3.2'
		5'	52	2.7'	2.7'	5'	34	3.7'	3.1'	5'	18	5.8'	3.8'	5'	7	13.7'	5.4'
		7'	27	3.8'	3.8'	7'	17	5.1'	4.3'	7'	9	8.1'	5.3'	7'	3	19.1'	7.5'
		9'	16	4.8'	4.8'	9'	10	6.6'	5.6'	9'	6	10.4'	6.8'	9'	2	24.6'	9.6'

*Not Sold by W.A.C Lighting