


MODEL R5VI-R-ICA

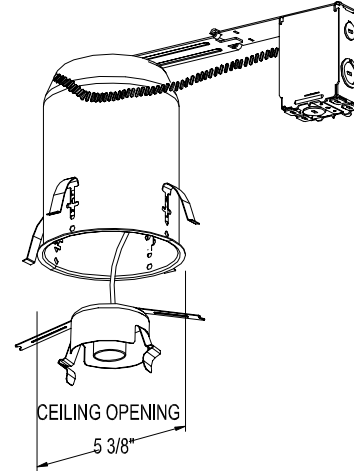

Ordering information

R5VI	-	-	R	-	ICA
Series		Housing Depth	Housing Type		Options
R5VI Recessed 5" Vertical Incandescent		S - Shallow Depth Blank - Normal Depth	R - Remodel Housing Blank - New Construction		ICA - Insulation Contact & Air Tight

Product Features

Application: Remodeling housing, suitable for direct contact with insulation. Complies with requirements for Washington State Energy Code (WESC) for air tight housings (when installed as instructed with option gasket kit "RGK"). Maximum 1 inch ceiling thickness.

J Box: Supplied with four standard knockouts and four integral Romex® clamps. Spring loaded door, for easy access to wiring. Approved for through branch wiring.

Mounting: Housing mounts to ceilings up to 3/4" thick with pressure spring clips. Clips allow easy removal of housing.

Material: 20 gauge galvanized steel with ceramic/nickel-plated socket.










Listing

UL & CUL listed. Suitable for damp locations.

W.A.C. reserves the right to change details that do not affect overall function and performance.



MODEL R5VI-R-ICA

<p>R5VT-21-□□ Finishes: SC, SG Lamp: A19 40W, PAR30 50W</p>		<p>R5VT-22-□□ Finishes: WT Lamp: PAR30 50W</p>		<p>R5VT-23-□□ Finishes: SBK, SC, SG, WT Lamp: PAR30 50W</p>	
<p>R5VT-24-□□ Finishes: BK, WT Lamp: PAR30 50W</p>		<p>R5VT-25-□□ Finishes: BK, WT Lamp: A19 40W PAR30 50W</p>		<p>R5VT-37-□□ Finishes: BK, WT Lamp: PAR20 50W</p>	
<p>R5VT-39-□□ Finishes: WT Lamp: PAR30 50W</p>		<p>R5VT-41-□□ Finishes: WT Lamp: PAR30 50W</p>		<p>R5VT-42-□□* Finishes: SC, SG Lamp: A19 40W PAR30 50W</p>	

Finish Key: BK-Black, SBK-Specular Black, SC-Specular Clear, SG-Specular Gold, WT-White
 All trims are white, finish choices refer to baffle or reflector color.
 *Trim finish is the same as the reflector.

