



MODEL R5VI-S-ICA

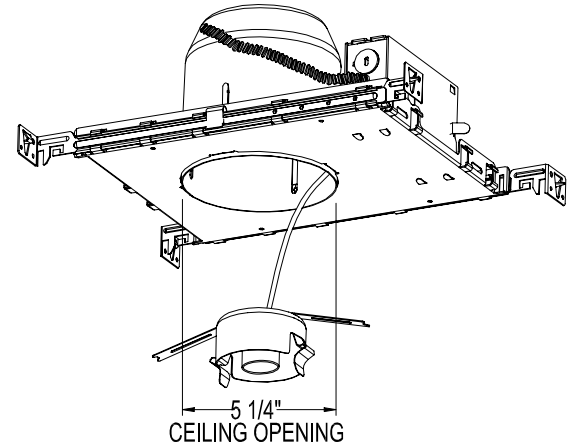

Ordering information



R5VI
 Recessed 5"
 Vertical
 Incandescent

S - Shallow Depth
 Blank - Normal Depth

R - Remodel Housing
 Blank – New Construction

ICA - Insulation Contact & Air Tight

Product Features

Application: Shallow new construction housing suitable for insulation contact. Complies with requirements for Washington State Energy Code (WESC) for air tight housings (when installed as instructed with option gasket kit "RGK"). Maximum 1 3/4 inch ceiling thickness.

J Box: Junction box is accessible from above or below the ceiling. Supplied with eight standard knockouts and four integral Romex® clamps. Spring loaded door, for easy access to wiring. Approved for through branch wiring.

Mounting: Supplied with hanger bars adjustable to 25" Bars have score lines and can be cut to accommodate 12" joist spans. Bars have notches for easy installation on T-bars. Hanger bars mount on all four sides.





Material: 20 gauge galvanized steel. Ceramic/nickel-plated socket.

Listing

UL & CUL listed. Suitable for damp locations.

W.A.C. reserves the right to change details that do not affect overall function and performance.



<p>R5VT-22-□□ Finishes: WT Lamp: PAR30 50W</p>		<p>R5VT-23-□□ Finishes: SBK, SC, SG, WT Lamp: A19 40W PAR30 50W</p>		<p>R5VT-24-□□ Finishes: BK, WT Lamp: PAR30 50W</p>	
<p>R5VT-25-□□ Finishes: BK, WT Lamp: A19 40W PAR30 50W</p>					

Finish Key: BK-Black, SBK-Specular Black, SC-Specular Clear, SG-Specular Gold, WT-White
 All trims are white, finish choices refer to baffle or reflector color.

