


**MODEL R5VI-S-R-ICA**

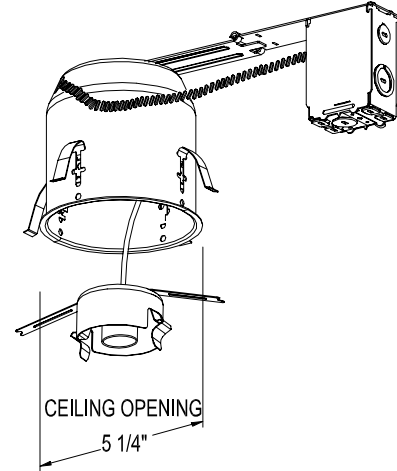

**Ordering information**

R5VI	-	S	-	R	-	ICA
Series		Housing Depth		Housing Type		Options
<p><b>R5VI</b> Recessed 5" Vertical Incandescent</p>		<p>S - Shallow Depth Blank - Normal Depth</p>		<p>R - Remodel Housing Blank – New Construction</p>		<p>ICA - Insulation Contact &amp; Air Tight</p>

**Product Features**

**Application:** Shallow remodeling housing suitable for insulation contact. Complies with requirements for Washington State Energy Code (WESC) for air tight housings (when installed as instructed with option gasket kit "RGK"). Maximum 1 inch ceiling thickness.

**J Box:** Junction box is accessible from above or below the ceiling. Supplied with eight standard knockouts and four integral Romex® clamps. Spring loaded door, for easy access to wiring. Approved for through branch wiring.

**Mounting:** Housing retained to ceiling with four spring clips. Removable for junction box access.

**Material:** 20 gauge galvanized steel. Ceramic/ nickel-plated socket.





**Listing**

UL & CUL listed. Suitable for damp locations.

W.A.C. reserves the right to change details that do not affect overall function and performance.



**MODEL R5VI-S-R-ICA**

<p>R5VT-22-□□                  Finishes: WT                  Lamp: PAR30 50W</p>		<p>R5VT-23-□□                  Finishes: SBK, SC, SG,                  WT                  Lamp: PAR30 50W</p>		<p>R5VT-24-□□                  Finishes: BK, WT                  Lamp: PAR30 50W</p>	
<p>R5VT-25-□□                  Finishes: BK, WT                  Lamp: PAR30 50W</p>					

Finish Key: BK-Black, SBK-Specular Black, SC-Specular Clear, SG-Specular Gold, WT-White  
 All trims are white, finish choices refer to baffle or reflector color.

