

**Catalog Information**

**2-WIRE (L)**      **3-WIRE (H)**      **WIDE 2-WIRE (J)**      **FINISHES**



LTK-753      HTK-753      JTK-753      BK, WT

Finish Key: BK-Black, WT-White

**Product Features**

1. **Aiming:** 90° degrees from vertical and 356° rotational. Cast swivel with locking knob.
2. **Compatible:** L, H, and J models in addition to fitting our own tracks are retrofitable to other manufacturers original tracks (consult factory for specific brand names).
3. **Special Application:** The J style head may be installed on any "J" style 2-circuit track with the addition of the J-CLIP.
4. **Lamping:** Re-lamps from the front.
5. **Socket:** Porcelain with Nickel-plated shell. No visible socket wire.

Lamp Type	Wattage	Voltage
PAR 20	30W – 50W	120V

**Options/Accessories**

Extensions available for "H" style 3-wire series track heads only. Available in 18", 24", 36" and 48" lengths. Specify H18, H24, H36 or H48 (in BK or WT).

**Material**

Die Cast Aluminum

**Listing**

UL, CUL Listed, New York City Approved.


W.A.C. reserves the right to change details that do not affect overall function and performance.



**SPECIFICATION SHEET**

**LINE VOLTAGE TRACK HEADS**

**MODEL 753**

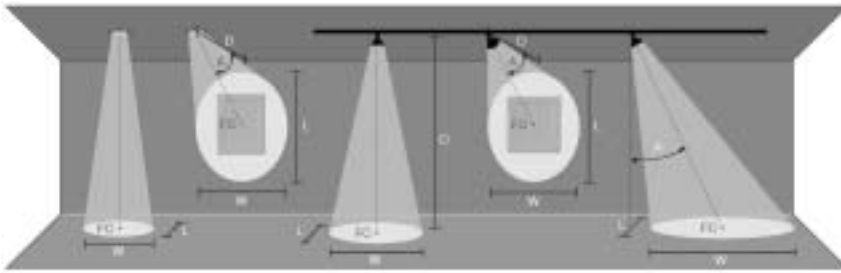

**Key** In Feet  
**D** Distance To Fixture From Wall Or Floor  
**FC** Initial Footcandle Level At Center Of Beam  
**L** Beam Length(where candlepower drops to 50% of maximum)  
**W** Beam Width(where candlepower drops to 50% of maximum)  
**CBCP** Center Beam Candle Power

Lamp	Beam Spread	CBCP	0°Aiming Angle				30°Aiming Angle				45°Aiming Angle				60°Aiming Angle			
			D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
50W PAR20 NSP10°		6000	3'	667	0.5'	0.5'	3'	433	0.7'	0.6'	3'	236	1.1'	0.7'	3'	83	2.1'	1.0'
			5'	240	0.9'	0.9'	5'	156	1.2'	1.0'	5'	85	1.8'	1.2'	5'	30	3.6'	1.7'
			7'	122	1.2'	1.2'	7'	80	1.6'	1.4'	7'	43	2.5'	1.7'	7'	15	5.0'	2.4'
			9'	74	1.6'	1.6'	9'	48	2.1'	1.8'	9'	26	3.2'	2.2'	9'	9	6.4'	3.1'
50W PAR20 FL25°		1500	3'	167	1.3'	1.3'	3'	108	1.8'	1.5'	3'	59	2.8'	1.9'	3'	21	6.2'	2.7'
			5'	60	2.2'	2.2'	5'	39	3.0'	2.6'	5'	21	4.7'	3.1'	5'	8	10.4'	4.4'
			7'	31	3.1'	3.1'	7'	20	4.2'	3.6'	7'	11	6.5'	4.4'	7'	4	14.6'	6.2'
			9'	19	4.0'	4.0'	9'	12	5.4'	4.6'	9'	7	8.4'	5.6'	9'	2	18.7'	8.0'

Data based on GE PAR20 Lamps.  
 PAR20 lamps are not sold by W.A.C Lighting