

Catalog Information

2-WIRE (L)	3-WIRE (H)	WIDE 2-WIRE (J)	FINISHES
------------	------------	-----------------	----------



LTK-774	H	TK-774	BK, WT, BN/BK, BN/WT
---------	---	--------	----------------------

Finish Key: BK-Black, WT-White, BN/BK-Black with Brushed Nickel Head, BN/WT-White with Brushed Nickel Head

Product Features

- Aiming:** 90 degrees from vertical and 356 rotational.
- Compatible:** L, H, and J models in addition to fitting our own tracks are retrofitable to other manufacturers original tracks (consult factory for specific brand names).
- Special Application:** The J style head may be installed on any "J" style 2-circuit track with the addition of the J-CLIP.
- Lamping:** Re-lamps from the front.
- Socket:** Porcelain with Nickel-plated shell.

Lamp Type	Wattage	Voltage
PAR 30	50W ...75W	120V

Options/Accessories

Extensions available for "H" style 3-wire series track heads only. Available in 18", 24", 36" and 48" lengths. Specify H18, H24, H36 or H48 (in BK or WT).

Material

Die Cast Aluminum

Listing

UL, CUL Listed, New York City Approved.


W.A.C. reserves the right to change details that do not affect overall function and performance.



SPECIFICATION SHEET

LINE VOLTAGE TRACK HEADS

MODEL 774

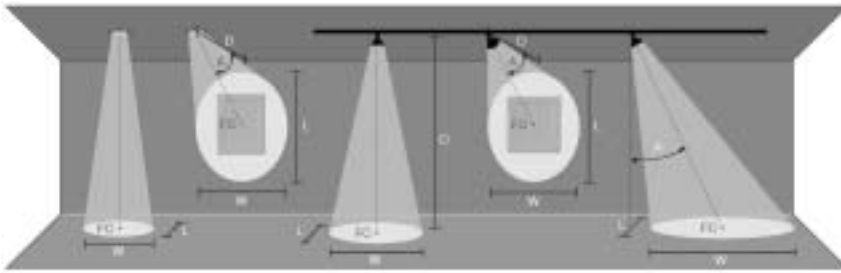

Key	In Feet
D	Distance To Fixture From Wall Or Floor
FC	Initial Footcandle Level At Center Of Beam
L	Beam Length(where candlepower drops to 50% of maximum)
W	Beam Width(where candlepower drops to 50% of maximum)
CBCP	Center Beam Candle Power

Lamp Beam Spread	CBCP	0°Aiming Angle				30°Aiming Angle				45°Aiming Angle				60°Aiming Angle			
		D	FC	L	W	D	FC	L	W	D	FC	L	W	D	FC	L	W
50W PAR30 SP7°	13000	3'	1444	0.4'	0.4'	3'	938	0.5'	0.4'	3'	511	0.7'	0.5'	3'	181	1.5'	0.7'
		5'	520	0.6'	0.6'	5'	338	0.8'	0.7'	5'	184	1.2'	0.9'	5'	65	2.5'	1.2'
		7'	265	0.9'	0.9'	7'	172	1.1'	1.0'	7'	94	1.7'	1.2'	7'	33	3.5'	1.7'
		9'	160	1.1'	1.1'	9'	104	1.5'	1.3'	9'	57	2.2'	1.6'	9'	20	4.5'	2.2'
50W PAR30 FL25°	2000	3'	222	1.3'	1.3'	3'	144	1.8'	1.5'	3'	79	2.8'	1.9'	3'	28	6.2'	2.7'
		5'	80	2.2'	2.2'	5'	52	3.0'	2.6'	5'	28	4.7'	3.1'	5'	10	10.4'	4.4'
		7'	41	3.1'	3.1'	7'	27	4.2'	3.6'	7'	14	6.5'	4.4'	7'	5	14.6'	6.2'
		9'	25	4.0'	4.0'	9'	16	5.4'	4.6'	9'	9	8.4'	5.6'	9'	3	18.7'	8.0'
50W PAR30 FL35°	1400	3'	156	1.9'	1.9'	3'	101	2.6'	2.2'	3'	55	4.2'	2.7'	3'	19	10.8'	3.8'
		5'	56	3.2'	3.2'	5'	36	4.3'	3.6'	5'	20	7.0'	4.5'	5'	7	18.0'	6.3'
		7'	29	4.4'	4.4'	7'	19	6.1'	5.1'	7'	10	9.8'	6.2'	7'	4	25.2'	8.8'
		9'	17	5.7'	5.7'	9'	11	7.8'	6.6'	9'	6	12.6'	8.0'	9'	2	32.3'	11.4'
75W PAR30 SP10°	13000	3'	1444	0.5'	0.5'	3'	938	0.7'	0.6'	3'	511	1.1'	0.7'	3'	181	2.1'	1.0'
		5'	520	0.9'	0.9'	5'	338	1.2'	1.0'	5'	184	1.8'	1.2'	5'	65	3.6'	1.7'
		7'	265	1.2'	1.2'	7'	172	1.6'	1.4'	7'	94	2.5'	1.7'	7'	33	5.0'	2.4'
		9'	160	1.6'	1.6'	9'	104	2.1'	1.8'	9'	57	3.2'	2.2'	9'	20	6.4'	3.1'
75W PAR30 FL25°	3100	3'	344	1.3'	1.3'	3'	224	1.8'	1.5'	3'	122	2.8'	1.9'	3'	43	6.2'	2.7'
		5'	124	2.2'	2.2'	5'	81	3.0'	2.6'	5'	44	4.7'	3.1'	5'	16	10.4'	4.4'
		7'	63	3.1'	3.1'	7'	41	4.2'	3.6'	7'	22	6.5'	4.4'	7'	8	14.6'	6.2'
		9'	38	4.0'	4.0'	9'	25	5.4'	4.6'	9'	14	8.4'	5.6'	9'	5	18.7'	8.0'
75W PAR30 FL35°	2000	3'	222	1.9'	1.9'	3'	144	2.6'	2.2'	3'	79	4.2'	2.7'	3'	28	10.8'	3.8'
		5'	80	3.2'	3.2'	5'	52	4.3'	3.6'	5'	28	7.0'	4.5'	5'	10	18.0'	6.3'
		7'	41	4.4'	4.4'	7'	27	6.1'	5.1'	7'	14	9.8'	6.2'	7'	5	25.2'	8.8'
		9'	25	5.7'	5.7'	9'	16	7.8'	6.6'	9'	9	12.6'	8.0'	9'	3	32.3'	11.4'

Data based on GE PAR30 Lamps.
PAR30 lamps are not sold by W.A.C Lighting