


INSTRUCTIONS: Model: QP-801 Pendant Socket Set

Read all instructions before installing.
Disconnect power before installing or re-lamping.

Overview: Pendant sockets sets are designed for use with all WAC quick connect adapters. They may also be used on other manufacturers brand of quick connect (consult factory for compatibility). Pendants may be mounted to monorail, monopoints, line volt flexible track or standard line volt track, by coupling to a low voltage quick connect adapter. Sockets are supplied with a 6' cable and may be field cut to desired length.

Installing Shade:

1. Socket is constructed in three pieces.
2. Insert lamp 12V 50W max. bi-pin Xenon,(not tungsten halogen) into the lower socket (supplied with 12V, a 24 volt lamp may also be used with appropriate power supply).
3. Hold lower shade against the spring band and push firmly until shade seats.
4. Remove the quick connector adapter (see shortening pendant).
5. Unscrew the finial portion of the socket and withdraw it and the hang straight tube from the cable.
6. Pass the open cable end through the outer shade, followed by the finial and hang straight tube.
7. Loosen the setscrew on the middle socket ring and adjust the shade height so that the bottoms of both shades are flush, then retighten.
8. Re-install the quick connect adapter. If shortening the pendant do this before re installing (see shortening pendant).

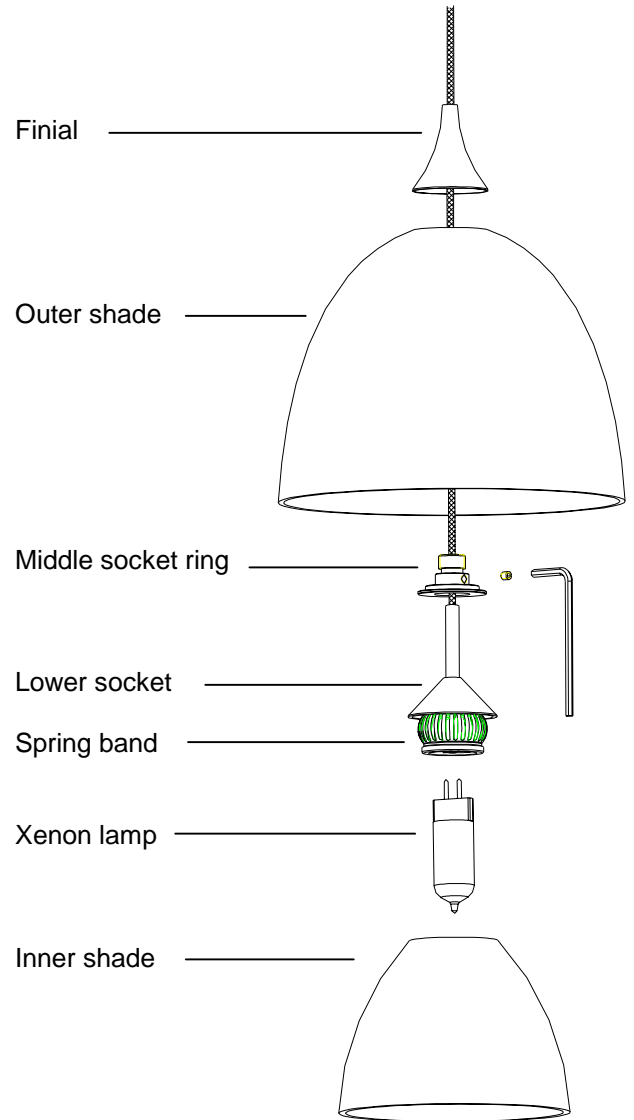


Installing Pendant to Quick Connect:


1. Insert the post of the quick connect into the quick connect adapter.
2. Thread the top half of the conical section until it seats with the adapter.
3. Adjust fixture position, use caution not to loosen the conical section.

Accessories: Series G811 or G812 glass shades.

See reverse for field shortening pendants.



Installing to Quick Connect
Quick connect fitting



Quick connect adapter



W • A • C | LIGHTING

www.waclighting.com

615 South Street, Garden City, NY 11530
Tel: (516) 515-5000 Fax: (516) 516-5050

168 Brea Canyon Road, City of Industry, CA 91789
Tel: (909) 468-1848 Fax: (909) 468-9958

08/04/03 REV 1

To Shorten Pendant:

All Pendant shades use the quick connect adapter to attach to the rail. To shorten a pendant fixture the quick connect adapter can be removed from the coaxial cable, the cable can be cut to size. The coaxial cable also needs to be removed to install glass shades with holes too small for the sockets to pass through. Follow the step-by-step instructions below.

