American Standard

ORBIT™ UNDERCOUNTER LAVATORY

VITREOUS CHINA

ORBIT™ UNDERCOUNTER LAVATORY

- Round undercounter mount lavatory
- Front overflow
- Unglazed rim for undercounter mounting
- Supplied with mounting kit and template

0630.000 Lavatory less faucet deck

Nominal Dimensions:
15-1/2” dia. x 6” (387 x 152mm)

Bowl sizes:
12-3/4” (311mm) wide, 4-3/8” (111mm) deep

Compliance Certifications -
Meets or Exceeds the Following Specifications:
- ASME A112.19.2M for Vitreous China Fixtures
- CAN/CSA B45 series

MEETS THE AMERICAN DISABILITIES ACT GUIDELINES AND ANSI A117.1 ACCESSIBLE AND USEABLE BUILDINGS AND FACILITIES - CHECK LOCAL CODES.
Install lavatory 864mm (34") from finished floor. Lavatory installed 64mm (2-1/2") minimum from front edge of countertop provides 686mm (27") knee clearance area.

To Be Specified

Color:

Faucet*:

Faucet Finish:

Supplies:

1-1/4" Trap:

Nipple:

* See faucet section for additional models available

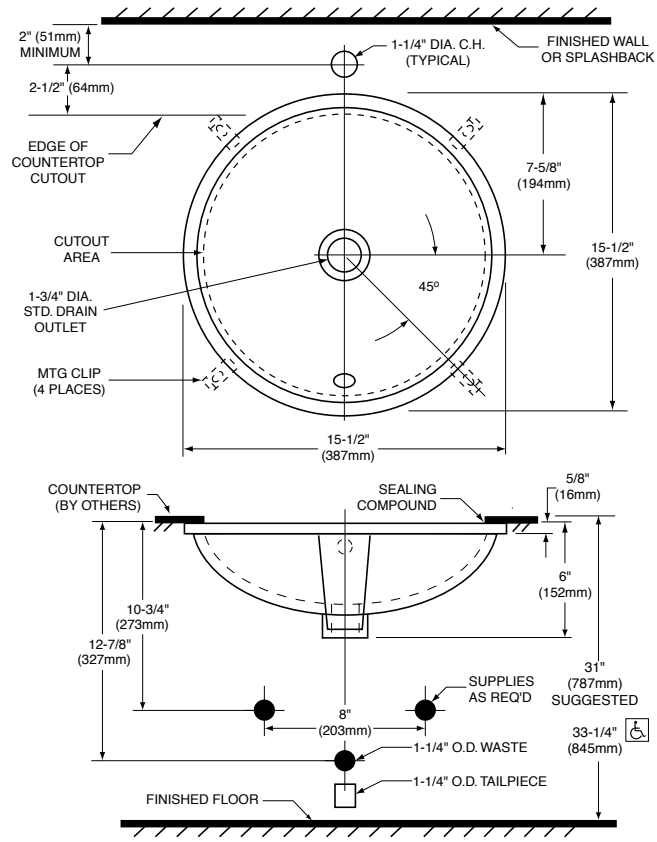

NOTES:
* DIMENSIONS SHOWN FOR LOCATION OF SUPPLIES AND "P" TRAP ARE SUGGESTED. FOR COUNTERTOP CUTOUT USE TEMPLATE SUPPLIED WITH LAVATORY.
FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.
UNDERCOUNTER MOUNTING KIT AND INSTALLATION INSTRUCTIONS SUPPLIED WITH LAVATORY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard A112.19.2. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2002 American Standard Inc.