American Standard

CADET™ ELONGATED TOILET

VITREOUS CHINA

CADET™ ELONGATED TOILET

❑ **2898.012**

- Vitreous china
- Low-consumption (6.0 Lpf/1.6 gpf)
- Elongated siphon action jetted bowl
- Fully glazed 2" **Ballpass** trapway
- AquaForce flushing technology
- Large 11" x 9" water surface area
- Close-coupled tank w/raised lip detail on tank cover
- Color-matched trip lever
- Speed Connect™ tank/bowl coupling system
- Sanitary bar on bowl
- 2 bolt caps
- 100% factory flush tested

❑ **3459.016** Bowl

❑ **4112.016** Tank

Nominal Dimensions:
749 x 495 x 762mm
(29-1/2" x 19-1/2" x 30")

Fixture only, seat and supply by others

Alternate Tank Configurations Available:

❑ **4112.500** Tank complete w/Aquaguard Liner

❑ **4112.600** Tank complete w/Cover Locking Device

❑ **4112.700** Tank complete w/Aquaguard Liner and Cover Locking Device

❑ **4112.800** Tank complete w/Trip Lever Located on Right Side

To Be Specified

❑ Color:

❑ Seat: American Standard #5324.019 "Rise and Shine" (with easy to clean lift-off hinge system) solid plastic closed front seat with cover. See pageTB-001.

❑ Seat: American Standard #5311.012 "Laurel" molded closed front seat with cover. See pageTB-001.

❑ Alternate Seat:

❑ Supply with stop:

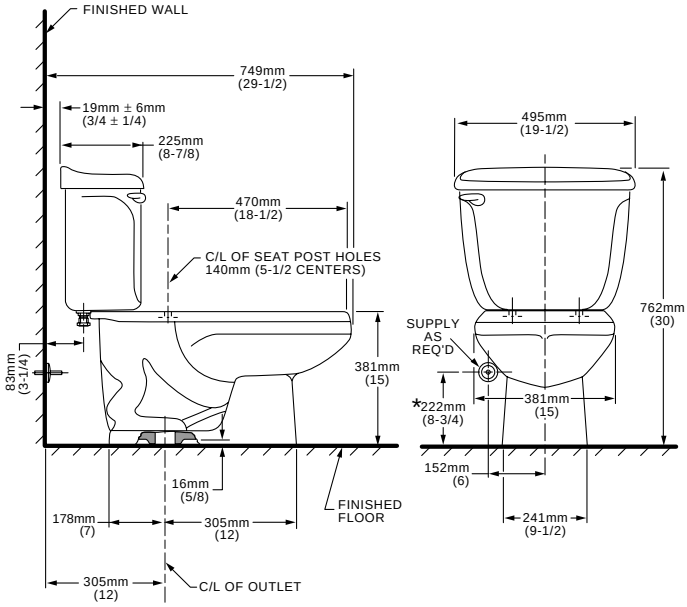

NOTES:
THIS COMBINATION IS DESIGNED TO ROUGH-IN AT A MINIMUM DIMENSION OF 305MM (12") FROM FINISHED WALL TO C/L OF OUTLET.
* DIMENSION SHOWN FOR LOCATION OF SUPPLY IS SUGGESTED.
SUPPLY NOT INCLUDED WITH FIXTURE AND MUST BE ORDERED SEPARATELY.
IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerance established by ANSI Standard A112.19.2
These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

Compliance Certifications -
Meets or Exceeds the Following Specifications:

- ASME A112.19.2M (and 19.6M) for Vitreous China Fixtures - includes Flush Performance, Ball Pass Diameter, Trap Seal Depth and all Dimensions

© 2004 American Standard Inc.